

Wall mounted OTW15

A wall mounted compact dehumidifier designed to fit above a standard doorway.

- ☑ Especially for use in:
 - Public buildings
 - Changing rooms
 - Store rooms and stairwells
 - Cellars and basements
- ☑ Self contained with fully automatic operation
 - ☑ Integral humidistat
 - ☑ Tamper proof controls
- ☑ Epoxy polyester painted zintec steel cabinet
 - ☑ Hot gas defrost for low temperature operation
 - ☑ Air filter

Specifications	Units	OTW15AX
Performance		
Operating temperature range	°C	0-35
Dehumidification @ 30°C/60% RH	kg/24h	15
Heat recovered to air @ 30°C/60% RH	kW	0.9
Air flow	m ³ /h	225
External static pressure	Pa	0
Sound pressure level @ 3m	dB(A)	53
Refrigerant		R407c
Electrical data		
Supply	V/ph/Hz	230/1N/50
Nominal power consumption	kW	0.43
FLA	amps	3.8
Maximum supply fuse	amps	10
LRA (compressor start)	amps	18
Dimensions		
Width	mm	825
Depth	mm	363
Height	mm	320
Weight	kg	33
Condensate drain size (flexible plastic hose)	mm ID	10

Options


- Through the wall version

OTW15



Performance data

OTW15

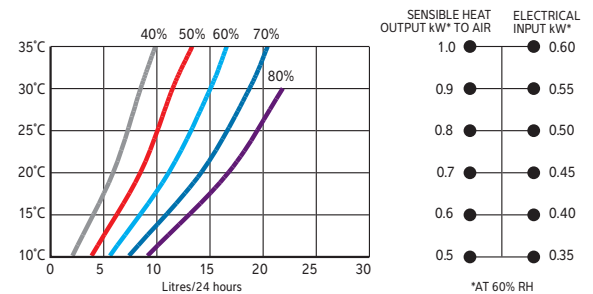

The OTW15 is tamper proof – ideal for use in public buildings

Free advice from staff qualified by years of experience and strong technical knowledge

