

Wall mounted DH30/60


Wall mounted compact dehumidifiers with air heating options.

- ✓ Ideal for dehumidification in:
 - Clothes drying rooms
 - Warehousing and storage
 - Electrical sub-stations
 - Sports clubs and changing rooms
- ✓ Self contained with fully automatic operation
 - ✓ Integral humidistat
 - ✓ Polyester coated evaporator and condenser
- ✓ Plastisol coated galvanised steel cabinet
 - ✓ Hot gas defrost for low temperature operation (X models)
 - ✓ Quiet centrifugal fans


Specifications	Units	DH30A/ DH30AX	DH30AP/ DH30AXP	DH60A/ DH60AX	DH60AP/ DH60AXP
Performance					
Operating temperature range	°C	15-35/ 0-35	15-35/ 0-35	15-35/ 0-35	15-35/ 0-35
Dehumidification @ 30°C/60% RH	kg/24h	30	30	60	60
Heat recovered to air @ 30°C/60% RH	kW	1.9	1.9	3.5	3.5
Air flow	m³/h	700	700	1280	1280
External static pressure	Pa	0	0	0	0
Sound pressure level @ 3m	dB(A)	52	52	54	54
Refrigerant		R407c	R407c	R407c	R407c
Electrical data					
Supply	V/ph/Hz	230/1N/50	230/1N/50	230/1N/50	230/1N/50
Dehumidifier power input	kW	0.75	0.75	1.2	1.2
FLA	amps	4.4	12.7	7.5	24.2
Maximum supply fuse	amps	10	20	13	32
LRA (compressor start)	amps	15.8	15.8	30.0	30.0
Heater					
Type		Optional LPHW	Standard Electric	Optional LPHW	Standard Electric
Heat output	kW	3.0	2.0	5.0	4.0
Flow rate	l/min	5.0	-	5.0	-
Dimensions					
Width	mm	782	782	1247	1247
Depth	mm	270	270	270	270
Height	mm	648	648	648	648
Weight	kg	40	40	60	60
Condensate drain size (flexible plastic hose)	mm ID	10	10	10	10

Performance data

DH30

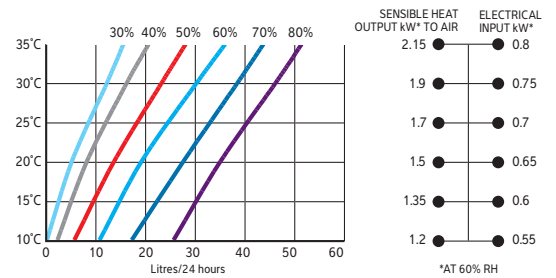

DH60

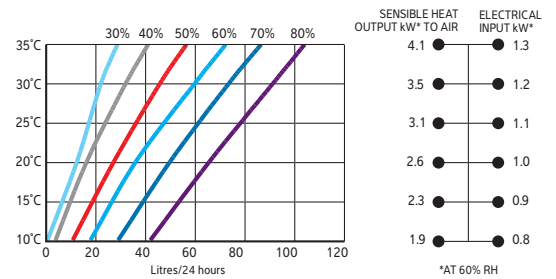

Options

- Through the wall version
- Electric air heater
- LPHW air heater
- Remote humidistat

DH30/DH60

